

MINI TANK WATER HEATER

APPLICATION: Commercial, industrial, residential, public lavatories.


PRODUCT FEATURES

- Point-of-Use Application
- Compact Design
- Easy Installation
- Adjustable Temperatures
- Includes Temperature/Pressure Relief Valve
- Hanging Bracket provided
- Power Plug Outlet Ready
- Field Replaceable Heating Element
- 1/2" NPT Connections

PRODUCT SPECIFICATIONS

Voltage:	110/120 volts
Amps:	12 amps
Heating Capacity:	1440 watts
Temperature Ranges:	50°-140°F
Max Operating Pressure:	80 psi
Max Pressure:	150 psi

DIMENSIONAL INFORMATION

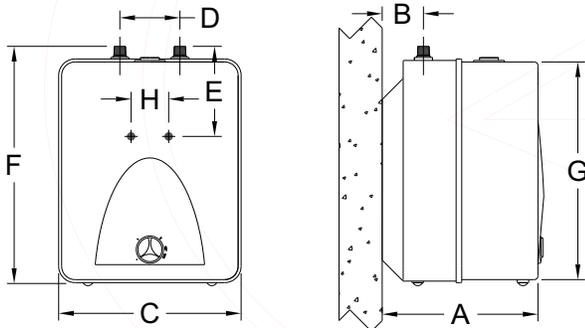

	CMT-1.3	CMT-2.5	CMT-4.0
A	10.0"	10.375"	10.375"
B	2.25"	2.75"	2.75"
C	11.0"	11.75"	11.75"
D	4.0"	4.0"	4.0"
E	6.0"	6.0"	6.0"
F	13.5"	15.5"	20.25"
G	12.5"	14.5"	19.25"
H	2.5"	2.5"	2.5"



Mini Tank Water Heater

The Chronomite Mini Tank water heaters can be used in most under the counter, point of use applications. Models CMT-1.3, CMT-2.5, and CMT-4.0 are designed to supply hot water for all hand wash and kitchen sinks in a residential, commercial or industrial environment. These heaters can replace traditional central hot water heaters thereby conserving water and reducing energy waste. The Chronomite Mini tank water heaters are lightweight, compact, manufactured for easy installation, and designed to be mounted on the wall.

BASE MODEL NUMBER (Must Specify):

CMT - 1.3

Tank Volume: 1.3 gallon
Dimensions: 12.5" H x 11" W x 10" D
Weight: 15 lbs.

CMT - 2.5

Tank Volume: 2.5 gallon
Dimensions: 14.5" H x 11.75" W x 10.375" D
Weight: 18 lbs.

CMT - 4.0

Tank Volume: 4.0 gallon
Dimensions: 19.25" H x 11.75" W x 10.375" D
Weight: 22 lbs.

Options

- CMT - ST70 (105°F) Tempering Valve



Member of
U.S. Green
Building Council



Water
Conserving
Product

Complies
with
Standards
for:



CHRONOMITE LABORATORIES, INC.
 17451 Hurley St. :: City of Industry, CA 91744
 Phone 800-447-4962 :: 626-937-4270
www.chronomite.com

MEMBER OF



Date: 11/06/15